

HIGH-SPEED DOOR

RolliGO KIT

Roll-up high-speed door



RolliGO KIT


**So simple, it practically
installs itself.**

**Designed for quick installation by a single
technician.**

Our product combines reliability and speed (up to 2.2 m/s) at an affordable price. It features a simple configuration, a flexible curtain and maximum safety thanks to integrated photocells. Available from stock for fast delivery.

Technical drawing

DWG files free to download in your GLG area

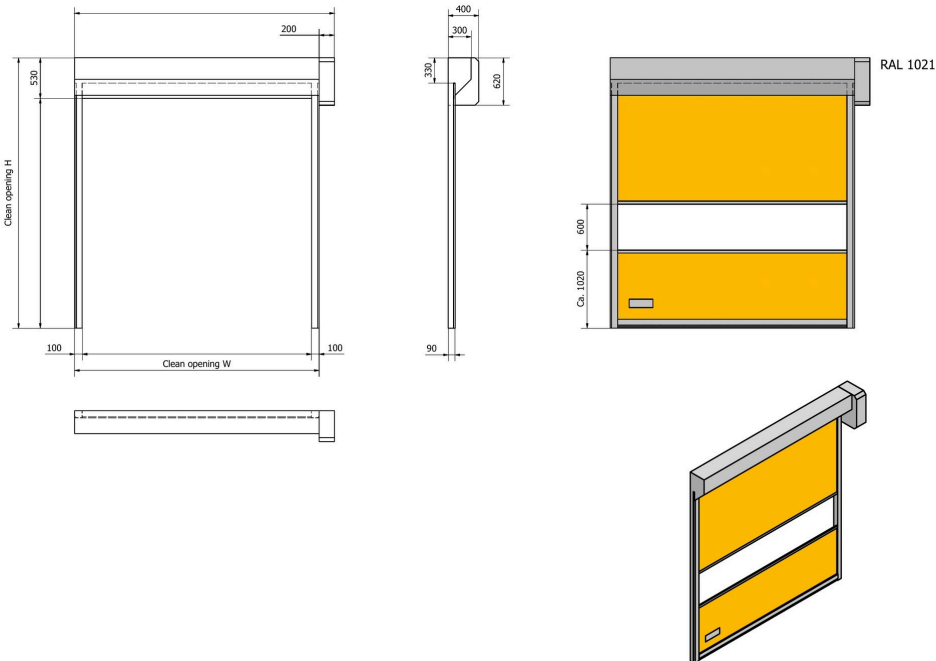

Structure	Galvanized. Optional: RAL-painted or AISI 304 stainless steel
Clear opening dimensions	5000 mm x H 5000 mm
Opening speed	0.8 m/s three-phase or up to 2.2 m/s (adjustable) - acceleration and deceleration
Closing speed	0.8 m/s (adjustable) - acceleration and deceleration
Wind load resistance	UNI EN 12424 Class 1
Power supply	230 V or 400 V AC three-phase
Covering	Fabric in 3 sections joined by an aluminium profile, PVC 900 g/m ² Flame-retardant Class 2 Fully glazed section Uprights with sealing gasket
Supplied in stock sizes	Width: 1500/1750/2000/2250/2500/2750/3000/4000/5000 mm Height: 2500/3000/4000/5000 mm
Installation	Designed for quick installation by a single technician Easily adapted to any size



Your GLG area

Everything in one place

In your area you will find DWG drawings, full media, and you
can request a free inspection.

Scan the QR code

