

RAPID DOOR

ZipGO 2.0

With adjustable guides




ZipGO 2.0



Speed, safety, reliability.

Fast › Opening up to 2.2 m/s

Safe › Multi-sensor protection

Flexible industrial door designed for high-speed, heavy-duty operations. Its robust structure, integrated inverter-controlled motor and advanced safety systems ensure efficiency, reliability and protection in demanding industrial environments. Ideal for warehouses, production facilities and logistics centres.

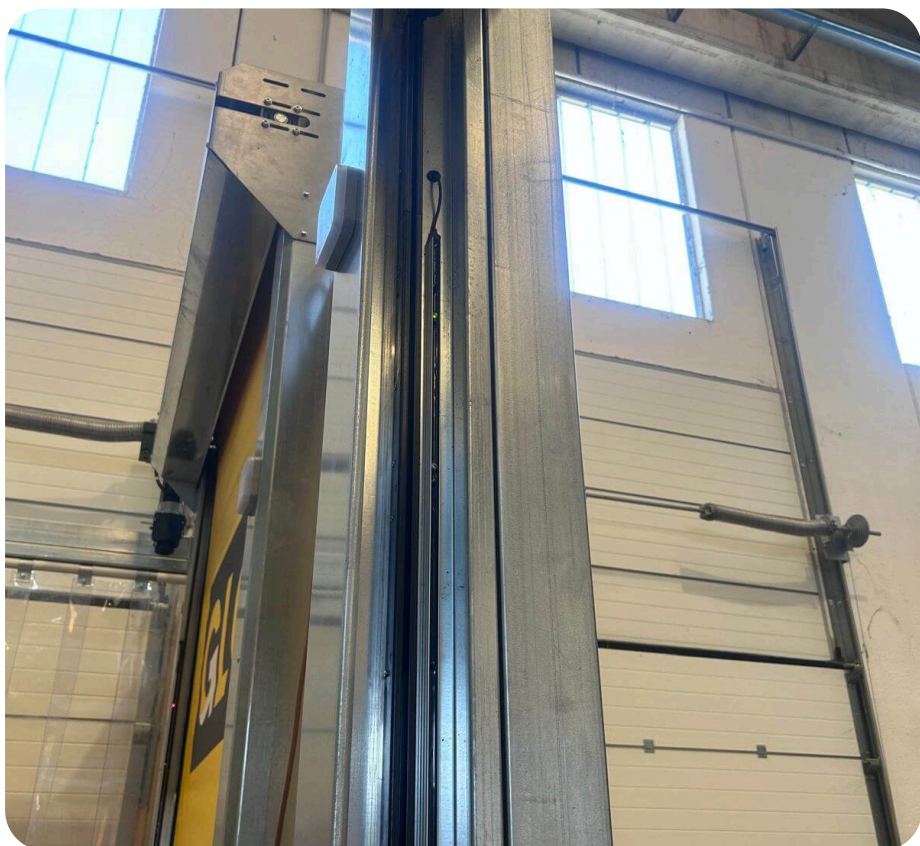

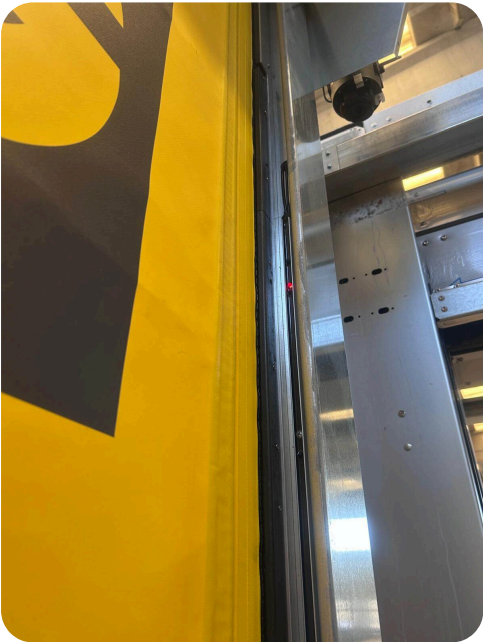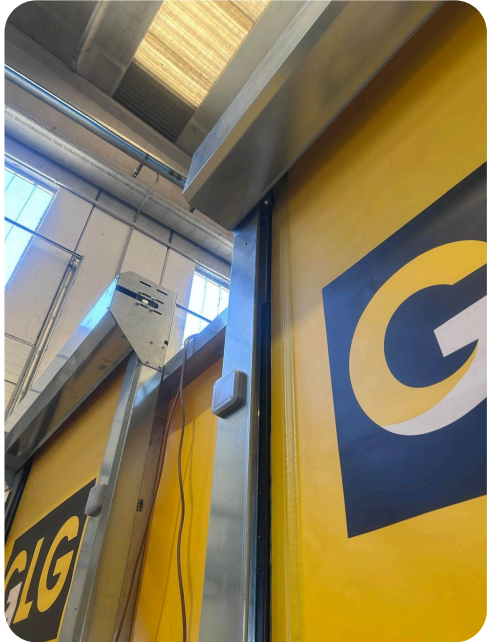

1. The first part of the paper is devoted to a general discussion of the problem of the existence of a solution of the system of equations (1) and (2) for arbitrary values of the parameters α and β .

2. In the second part we consider the case of the existence of a solution of the system of equations (1) and (2) for arbitrary values of the parameters α and β .

3. In the third part we consider the case of the existence of a solution of the system of equations (1) and (2) for arbitrary values of the parameters α and β .

4. In the fourth part we consider the case of the existence of a solution of the system of equations (1) and (2) for arbitrary values of the parameters α and β .

5. In the fifth part we consider the case of the existence of a solution of the system of equations (1) and (2) for arbitrary values of the parameters α and β .

6. In the sixth part we consider the case of the existence of a solution of the system of equations (1) and (2) for arbitrary values of the parameters α and β .



Enter the GLG world

Sign up or log in

With your GLG account you can download brochures,
complete data sheets and DWG drawings.

Scan the QR code

